

Our state-of-the-art manufacturing facility, sitting on 10 acres of land in Baltimore, Maryland, is the largest of its kind on the East Coast.


Across America, over 200,000 of our trailers are towing adventurers to the water's edge. We care deeply about our employees, customers, and products, and look forward to continuing what we do for generations to come.

WE KNOW BOATERS. WE ARE BOATERS.

# WEARE VENTURE TRAILERS.

Family owned and operated since 1988.



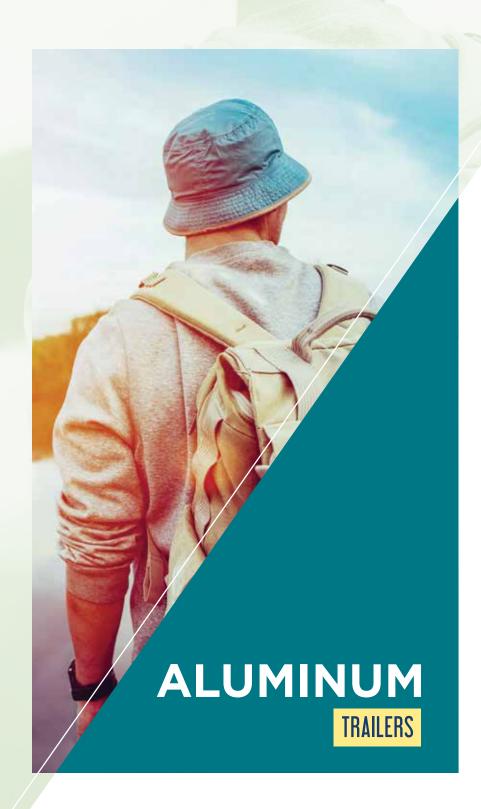




MODEL	TIRE SIZE	LOAD CAP. (LBS)	OVERALL WIDTH	OVERALL BOAT Length	BETWEEN Fender Widt	H COUPLER SIZE	BRAKES	TONGUE JACK
SINGLE AXLE	BUNK // 1025-3525 Load Ca	apacity						
VAB-1025	4.80X12LRC4H	1025	60"	12' - 14' *	42"	2"	No Brakes	Optional
VAB-1325	4.80X12LRC4H	1325	60"	14' - 15' *	42"	2"	No Brakes	Optional
VAB-2025	ST175/80D 13 LRC 5H	2025	93"	16' - 17' *	76"	2"	Optional	Optional
VAB-2425	ST185/80D 13 LRD 5H	2425	89"	16' - 18' *	71"	2"	Optional	Optional
VAB-2625	ST205/75D 14 LRC 5H	2625	89"	17' - 19' *	71"	2"	Optional	Optional
VAB-2825	ST205/75D 14 LRC 5H	2825	100"	18' - 20' *	81"	2"	Optional	Optional
VAB-3025	ST215/75D 14 LRC 5H	3025	100"	18' - 20' *	81"	2"	Standard	Standard
VAB-3325	ST225/75D 15 LRD 6H	3325	100"	20' - 22' *	81"	2"	Standard	Standard
VAB-3525	ST225/75D 15 LRD 6H	3525	100"	20' - 22' *	81"	2"	Standard	Standard
TANDEM AXL	E BUNK // 3625-8725 Load	Capacity						
VATB-3625	ST205/75D 14 LRC 5H	3625	100"	18' - 20' *	81"	2"	Standard 1	Standard
VATB-4225	ST205/75D 14 LRC 5H	4225	100"	21' - 22' *	81"	2"	Standard 1	Standard
VATB-5225	ST205/75D 14 LRC 5H	5225	100"	21' - 22' *	81"	2"	Standard 1	Standard
VATB-5925	ST205/75D 14 LRC 5H	5925	100"	23' - 24' *	81"	2"	Standard 1	Standard
VATB-6425	ST225/75D 15 LRD 6H	6425	100"	24' - 25' *	81"	2" (8,000 LB BALL)	Standard 1	Standard
VATB-7225	ST225/75D 15 LRD 6H	7225	100"	25' - 26' *	81"	2 5/16"	Standard 1	Standard
VATB-8025	ST225/75D 15 LRD 6H	8025	100"	25' - 26' *	81"	2 5/16"	Standard 1	Standard
VATB-8725	ST225/75D 15 LRD 6H	8725	100"	27' - 29' *	81"	2 5/16"	Standard 1	Standard
TRIPLE AXLE	BUNK // 9625-18025 Load	Capacity (Targ	get bunks co	me standard)				
VATB-9625	ST225/75D 15 LRD 6H	9625	100"	27' - 29' *	81"	2 5/16"	Standard 2	Standard
VATB-10625	ST225/75D 15 LRD 6H	10625	100"	27' - 29' *	81"	2 5/16"	Standard 2	Standard
VATB-12625	ST225/75D 15 LRD 6H	12625	100"	29' - 32' *	81"	2 5/16"	Standard 3	Standard
VATB-15025	ST235/80R 16 LRE 8H	15025	102"	32' - 36' *	82"	2 5/16"	Standard 3	Standard
VATB-18025	ST235/80R 16 LRE 8H	18025	102"	32' - 36' *	82"	2 5/16"	Standard 3	Standard
MODEL	TIRE SIZE	LOAD CAP. (LBS)	OVERALL WIDTH	OVERALL BOAT Length	BETWEEN Fender Width	# OF COUPLER ROLLERS SIZE	BRAKES	TONGUE JAC
	ROLLER // 2425-3525 Load							
VAR-2425	ST185/80D 13 LRD 5H	2425	89"	16' - 18' *	71"	16 2"	Optional	Optional
VAR-2625	ST205/75D 14 LRC 5H	2625	89"	17' - 19' *	71"	20 2"	Optional	Optional
VAR-2825	ST205/75D 14 LRC 5H	2825	100"	18' - 20' *	81"	20 2"	Optional	Optional
VAR-3025	ST215/75D 14 LRC 5H	3025	100"	18' - 20' *	81"	20 2"	Standard	Standard
VAB-3325	ST225/75D 15 LRD 6H	3325	100"	20' - 22' *	81"	20 2"	Standard	Standard
VAB-3525	ST225/75D 15 LRD 6H	3525	100"	20' - 22' *	81"	20 2"	Standard	Standard
TANDEM AXL	E ROLLER // 3625-6425 Loa	d Capacity						
VATR-3625	ST205/75D 14 LRC 5H	3625	100"	18' - 20' *	81"	20 2"	Standard 1	Standard
VATR-4225	ST205/75D 14 LRC 5H	4225	100"	21' - 22' *	81"	24 2"	Standard 1	Standard
VATR-5225	ST205/75D 14 LRC 5H	5225	100"	21' - 22' *	81"	28 2"	Standard 1	Standard
VATR-6025	ST205/75D 15 LRC 5H	6025	100"	23' - 24' *	81"	44 2" (8,000 LB BALL)	Standard 1	Standard
VATR-6425	ST225/75D 15 LRD 6H	6425	100"	24' - 25' *	81"	44 2" (8,000 LB BALL)	Standard 1	Standard



MODEL	TIRE SIZE	LOAD CAP. (LBS)	OVERALL Width	OVERALL BOAT Length	FRAME Size	BETWEEN Fender Width	# OF Rollers	COUPLER SIZE	BRAKES	TONGUE JACK
SINGLE AXLE	ROLLER // 1550-3350 Load	Capacity								
VR-1550	5.30 X 12 LRC 5H	1550	78"	14' - 15' *	2 X 3	60"	12	2"	No Brakes	Optional
VR-1850	5.30 X 12 LRD 5H	1850	78"	15' - 16' *	2 X 3	60"	12	2"	No Brakes	Optional
VR-2050	ST175/80D 13 LRC 5H	2050	84"	16' - 17' *	3 X 3	67"	12	2"	Optional	Optional
VR-2250	ST185/80D 13 LRD 5H	2250	84"	17' - 18' *	3 X 3	67"	16	2"	Optional	Optional
VR-2450	ST205/75D 14 LRC 5H	2450	88"	17' - 18.5' *	3 X 3	67"	16	2"	Optional	Optional
VR-2650	ST205/75D 14 LRC 5H	2650	100"	18' - 19' *	3 X 5	81"	20	2"	Optional	Optional
VR-2850S	ST205/75D 15 LRC 5H	2850	100"	18' - 20' *	3 X 5	81"	20	2"	Optional	Optional
VR-2850	ST205/75D 15 LRC 5H	2850	100"	20' - 21' *	3 X 5	81"	20	2"	Optional	Optional
VR-3050S	ST215/75D 14 LRC 5H	3050	100"	18' - 20' *	3 X 5	81"	20	2"	Standard	Standard
VR-3150	ST215/75D 14 LRC 5H	3150	100"	20' - 21' *	3 X 5	81"	20	2"	Standard	Standard
VR-3350	ST225/75D 15 LRD 6H	3350	100"	20' - 21' *	3 X 5	81"	20	2"	Standard	Standard
VRT-3650S	ST205/75D 14 LRC 5H	3650	100"	18' - 20' *	3 X 5	81"	20	2"	Standard 1	Standard
VRT-3750	ST205/75D 14 LRC 5H	3750	100"	21' - 23' *	3 X 5	81"	20	2"	Standard 1	Standard
VRT-4250	ST205/75D 14 LRC 5H	4250	100"	21' - 23' *	3 X 5	81"	24	2"	Standard 1	Standard
VRT-4750	ST205/75D 14 LRC 5H	4750	100"	21' - 23' *	3 X 5	81"	28	2"	Standard 1	Standard
VRT-5250	ST205/75D 15 LRC 5H	5250	100"	21' - 23' *	3 X 5	81"	32	2"	Standard 1	Standard
VRT-5650	ST205/75D 15 LRC 5H	5650	100"	21' - 23' *	3 X 5	81"	32	2" (8,000 LB BALL)	Standard 1	Standard
VRT-5950	ST225/75D 15 LRD 5H	5950	100"	24' - 25' *	3 X 5	81"	44	2" (8,000 LB BALL)	Standard 1	Standard
VRT-6450	ST225/75D 15 LRD 6H	6450	100"	25' - 26' *	3 X 5	81"	52	2" (8,000 LB BALL)	Standard 1	Standard
VRT-7450	ST225/75D 15 LRD 6H	7450	100"	25' - 27' *	3 X 5	81"	60	2 5/16"	Standard 1	Standard
VRT-7950	ST225/75D 15 LRD 6H	7950	100"	25' - 27' *	3 X 5	81"	64	2 5/16"	Standard 1	Standard
TRIPLE AXLE	ROLLER // 8650-10850 Load	d Capacity								
VRT-8650	ST205/75D 14 LRC 5H	8650	100"	27' - 28' *	3 X 5	81"	64	2 5/16"	Standard 2	Standard
VRT-9250	ST225/75D 15 LRD 6H	9250	100"	28' - 30' *	3 X 5	81"	64	2 5/16"	Standard 2	Standard
		10850	100"	29' - 31' *	3 X 5	81"	64	2 5/16"	Standard 2	Standard

<sup>\*</sup>Measure bow-eye to drain plug on all boats.

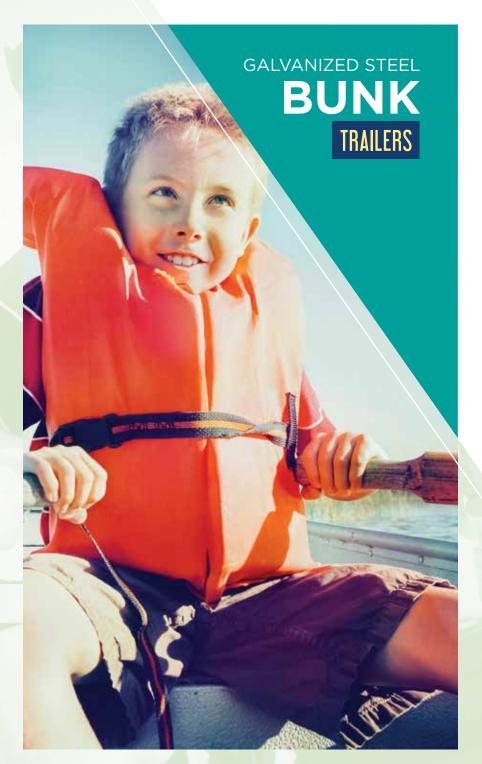



MODEL	TIRE SIZE	LOAD CAP. (LBS)	OVERALL WIDTH	OVERALL BOAT Length	FRAME Size	BETWEEN Fender Width	COUPLER SIZE	BRAKES	TONGUE JACK
SINGLE AXL	BUNK // 1000-3300 Load C	apacity							
VB-1000	4.80 X 12 LRC 4H	1000	60"	12' - 14' *	2 X 3	42"	2"	No Brakes	Optional
VB-1300	4.80 X 12 LRC 4H	1300	60"	14' - 15' *	2 X 3	42"	2"	No Brakes	Optional
VB-1500	5.30 X 12 LRC 5H	1500	78"	14' - 15' *	2 X 3	60"	2"	No Brakes	Optional
VB-1800	5.30 X 12 LRD 5H	1800	78"	15' - 16' *	2 X 3	60"	2"	No Brakes	Optional
VB-2000	ST175/80D 13 LRC 5H	2000	84"	16' - 17' *	3 X 3	67"	2"	Optional	Optional
VB-2200	ST185/80D 13 LRD 5H	2200	84"	17' - 18' *	3 X 3	67"	2"	Optional	Optional
VB-2400	ST205/75D 14 LRC 5H	2400	88"	17' - 18.5' *	3 X 3	67"	2"	Optional	Optional
VB-2600	ST205/75D 14 LRC 5H	2600	100"	18' - 19' *	3 X 5	81"	2"	Optional	Optional
VB-2800S	ST205/75D 15 LRC 5H	2800	100"	18' - 20' *	3 X 5	81"	2"	Optional	Optional
VB-2800	ST205/75D 15 LRC 5H	2800	100"	20' - 21' *	3 X 5	81"	2"	Optional	Optional
VB-3000S	ST215/75D 14 LRC 5H	3000	100"	18' - 20' *	3 X 5	81"	2"	Standard	Standard
VB-3100	ST215/75D 14 LRC 5H	3100	100"	20' - 21' *	3 X 5	81"	2"	Standard	Standard
VB-3300	ST225/75D 15 LRD 6H	3300	100"	20' - 21' *	3 X 5	81"	2"	Standard	Standard
TANDEM AXL	.E BUNK // 3600-7900 Load	Capacity							
VBT-3600S	ST205/75D 14 LRC 5H	3600	100"	18' - 20' *	3 X 5	81"	2"	Standard 1	Standard
VBT-3700	ST205/75D 14 LRC 5H	3700	100"	21' - 23' *	3 X 5	81"	2"	Standard 1	Standard
VBT-4200	ST205/75D 14 LRC 5H	4200	100"	21' - 23' *	3 X 5	81"	2"	Standard 1	Standard
VBT-4700	ST205/75D 14 LRC 5H	4700	100"	21' - 23' *	3 X 5	81"	2"	Standard 1	Standard
VBT-5200	ST205/75D 15 LRC 5H	5200	100"	21' - 23' *	3 X 5	81"	2"	Standard 1	Standard
VBT-5600	ST205/75D 15 LRC 5H	5600	100"	21' - 23' *	3 X 5	81"	2" (8,000 LB BALL)	Standard 1	Standard
	ST205/75D 15 LRC 5H ST225/75D 15 LRD 5H	5600 5900	100" 100"	21' - 23' * 24' - 25' *	3 X 5 3 X 5	81" 81"	2" (8,000 LB BALL) 2" (8,000 LB BALL)	Standard 1 Standard 1	Standard Standard
VBT-5900	*								
VBT-5600 VBT-5900 VBT-6400 VBT-7400	ST225/75D 15 LRD 5H	5900	100"	24' - 25' *	3 X 5	81"	2" (8,000 LB BALL)	Standard 1	Standard
VBT-5900 VBT-6400	ST225/75D 15 LRD 5H ST225/75D 15 LRD 6H	5900 6400	100" 100"	24' - 25' * 25' - 26' *	3 X 5 3 X 5	81" 81"	2" (8,000 LB BALL) 2" (8,000 LB BALL)	Standard 1 Standard 1	Standard Standard
VBT-5900 VBT-6400 VBT-7400 VBT-7900	ST225/75D 15 LRD 5H ST225/75D 15 LRD 6H ST225/75D 15 LRD 6H	5900 6400 7400 7900	100" 100" 100"	24' - 25' * 25' - 26' * 25' - 27' *	3 X 5 3 X 5 3 X 5	81" 81" 81"	2" (8,000 LB BALL) 2" (8,000 LB BALL) 2 5/16"	Standard 1 Standard 1 Standard 1	Standard Standard Standard
VBT-5900 VBT-6400 VBT-7400 VBT-7900	ST225/75D 15 LRD 5H ST225/75D 15 LRD 6H ST225/75D 15 LRD 6H ST225/75D 15 LRD 6H ST225/75D 15 LRD 6H	5900 6400 7400 7900	100" 100" 100" 100"	24' - 25' * 25' - 26' * 25' - 27' * 25' - 27' *	3 X 5 3 X 5 3 X 5 3 X 5	81" 81" 81" 81"	2" (8,000 LB BALL) 2" (8,000 LB BALL) 2 5/16" 2 5/16"	Standard 1 Standard 1 Standard 1 Standard 1	Standard Standard Standard Standard
VBT-5900 VBT-6400 VBT-7400 VBT-7900	ST225/75D 15 LRD 5H ST225/75D 15 LRD 6H ST225/75D 15 LRD 6H ST225/75D 15 LRD 6H	5900 6400 7400 7900	100" 100" 100"	24' - 25' * 25' - 26' * 25' - 27' *	3 X 5 3 X 5 3 X 5	81" 81" 81"	2" (8,000 LB BALL) 2" (8,000 LB BALL) 2 5/16"	Standard 1 Standard 1 Standard 1	Standard Standard Standard

<sup>\*</sup>Measure bow-eye to drain plug on all boats.





MODEL	TIRE SIZE	LOAD CAP. (LBS)	OVERALL WIDTH	SEATING	FRAME Size	BETWEEN Fender Width	COUPLER SIZE	TONGUE JACK
GALVANIZED	SINGLE AXLE WATERCRAFT	// 1200-2000	Load Capaci	ty				
VW-1200	4.80 X 12 LRC 4H	1200	60"	2/3 Seater	2 X 3	42"	2"	Optional
VW-2000	20.5 X 8.0 X 10 LRD 5H	2000	102"	Double	3 X 3	84"	2"	Optional
ALUMINUM S	INGLE AXLE WATERCRAFT //	1200 Load Ca	apacity					
VAW-1200	4.80 X 12 LRC 4H	1200	60"	2/3 Seater		42"	2"	Optional











MODEL	TIRE SIZE	LOAD CAP. (LBS)	OVERALL WIDTH	OVERALL Boat Length	BETWEEN Fender Width	COUPLER SIZE	BRAKES		TONGUE JACK	# OF AXLES
SINGLE AXLE	ALUMNINUM SKIFF // 1	800-3200 L	oad Capa	ncity						
VASK-1800	5.30X12 LRD 5H	1800	85"	15' - 17' *	65"	2"	No E	Brakes	Optional	1
VASK-2100	ST175/80D 13 LRC 5H	2100	89"	15' - 17' *	70"	2"	Opt	ional	Optional	1
VASK-2300	ST185/80D 13 LRD 5H	2300	89"	16' - 18' *	70"	2"	Opt	ional	Optional	1
VASK-2500	ST185/80D 13 LRD 5H	2500	100"	17' - 19' *	81"	2"	Opt	ional	Optional	1
VASK-2800	ST205/75D 14 LRC 5H	2800	100"	18' - 21' *	81"	2"	Opt	ional	Optional	1
VASK-3200	ST225/75D 15 LRD 5H	3200	100"	19' - 21' *	81"	2"	Standard 1		Standard	1
TANDEM AXL	E ALUMNINUM SKIFF //	4200 Load	Capacity							
VASK-4200S	ST205/75D 14 LRC 5H	4200	100"	21' - 22' *	81"	2"	Stan	dard 1	Standard	2
VASK-4200	ST205/75D 14 LRC 5H	4200	100"	22' - 23' *	81"	2"	Stan	dard 1	Standard	2
MODEL	TIRE SIZE	LOAD CAP. (LBS)	OVERALL WIDTH	OVERALL Boat Length	BETWEEN Fender Width	COUPLER SIZE	FRAME SIZE	BRAKES	TONGUE JACK	# OF AXLES
SINGLE AXLE	GALVANIZED SKIFF // 1	600-2400 L	oad Capa	city						
VSK-1600	20.5 X 8.0 X 10 LRD 5H	1600	84"	15' - 16' *	84"	2"	3 X 3	No Brakes	Optional	1
VSK-1800	ST175/80D 13 LRC 5H	1800	84"	17' - 18' *	84"	2"	3 X 3	No Brakes	Optional	1
VSK-2400	ST185/80D 13 LRD 5H	2400	84"	19' - 21' *	84"	2"	3 X 3	Optional	Optional	1

<sup>\*</sup>Measure bow-eye to drain plug on all boats.





MODEL	TIRE SIZE	LOAD CAP. (LBS)	OVERALL WIDTH	OVERALL BOAT Length	FRAME Size	BETWEEN Fender Width	COUPLER SIZE	BRAKES	TONGUE JACK
SINGLE AVI	.E PONTOON // 2000-	2500 Load	Canacity	,					
SINGLE AXL	.E PONTOON // 2000-	2500 Luau	. ,						
VP-20-20	ST185/80D 13 LRC	2000	98"	18' - 21' *	2 X 4	78"	2"	Optional	Optional
VP-24-20	ST185/80D 13 LRD	2000	98"	22' - 24' *	2 X 4	78"	2"	Optional	Optional
VP-20-25	ST185/80D 13 LRD	2500	98"	18' - 21' *	2 X 4	78"	2"	Optional	Optional
VP-24-25	ST185/80D 13 LRD	2500	98"	22' - 24' *	2 X 4	78"	2"	Optional	Optional
TANDEM AX	LE PONTOON // 3000	)-5000 Loa	d Capacit	ty					
VPT-24-30	5.30 X 12 LRC	3000	98"	23' - 24' *	2 X 4	78"	2"	Standard 1	Standard
VPT-26-30	5.30 X 12 LRC	3000	98"	24' - 26' *	2 X 4	78"	2"	Standard 1	Standard
VPT-26-40	ST175/80D 13 LRC	4000	98"	24' - 26' *	2 X 4	78"	2"	Standard 1	Standard
VPT-26-50	ST185/80D 13 LRD	5000	98"	24' - 26' *	2 X 4	78"	2"	Standard 1	Standard

<sup>\*</sup>Measure bow-eye to drain plug on all boats.


## STANDARD FEATURES

Inside load guide:

Heavy duty winch stanc with steps and handrai

Poly sleev

Disc brakes where applicable

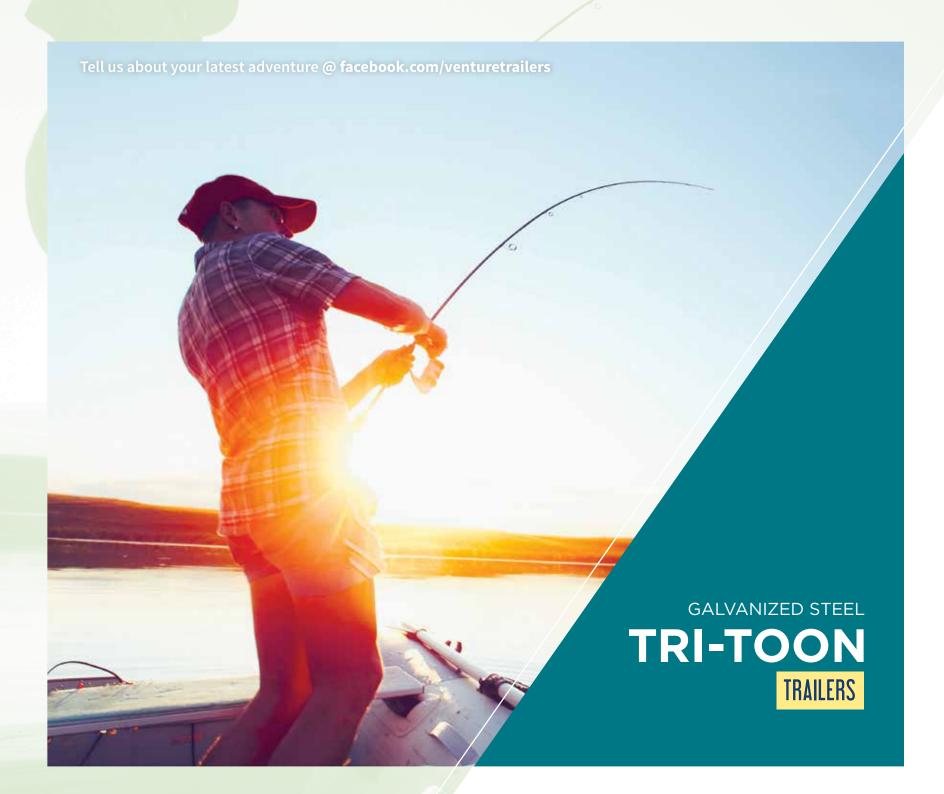



MODEL	TIRE SIZE	LOAD CAP. (LBS)	OVERALL WIDTH	OVERALL BOAT Length	FRAME Size	BETWEEN Fender Width	COUPLER SIZE	BRAKES	TONGUE JACK
SINGLE AXLE 1	TRI-TOON // 2000-250	00 Load Cai	pacity						
VP-20-20-TRI	ST185/80D 13 LRC	2000	98"	18' - 21' *	2 X 4	78"	2"	Optional	Optional
VP-24-20-TRI	ST185/80D 13 LRD	2000	98"	22' - 24' *	2 X 4	78"	2"	Optional	Optional
VP-20-25-TRI	ST185/80D 13 LRD	2500	98"	18' - 21' *	2 X 4	78"	2"	Optional	Optional
VP-24-25-TRI	ST185/80D 13 LRD	2500	98"	22' - 24' *	2 X 4	78"	2"	Optional	Optional
TANDEM AXLE	TRI-TOON // 3000-50	000 Load Ca	apacity						
VPT-24-30-TRI	5.30 X 12 LRC	3000	98"	23' - 24' *	2 X 4	78"	2"	Standard 1	Standard
VPT-26-30-TRI	5.30 X 12 LRC	3000	98"	24' - 26' *	2 X 4	78"	2"	Standard 1	Standard
VPT-26-40-TRI	ST175/80D 13 LRC	4000	98"	24' - 26' *	2 X 4	78"	2"	Standard 1	Standard
VPT-26-50-TRI	ST185/80D 13 LRD	5000	98"	24' - 26' *	2 X 4	78"	2"	Standard 1	Standard

<sup>\*</sup>Measure bow-eye to drain plug on all boats.

## STANDARD FEATURES

Inside load guides

Heavy duty winch stand with steps and handrai

Poly sleev


Disc brakes where applicable

# **CUSTOMIZE ANY TRAILER**

# TO YOUR SPECIFICATIONS WITH OUR ACCESSORIES

Additional accessories available upon request.













































# WHY CHOOSE VENTURE?

# TRAILER FEATURES

We understand our customer's boating experiences begin out of the water, and that the quality and durability of their trailers is extremely important. That's why we include so many key features as standard equipment. It's one way we keep our standards of excellence as high as our customer's expectations.

Some features are not standard on all models.
Please check with your dealer for additional information.

# WE ARE NMMA/NATM CERTIFIED





When you buy a NMMA/NATM Certified trailer, you gain the confidence of knowing it meets voluntary industry safety and construction standards because it has been meticulously inspected by a third-party professional. Venture Trailers has been a proud member of both certification programs since its inception.

For more information on the NMMA and their trailer certification requirements, visit nmma.org/certification/trailers

For more information on the NATM and their compliance program, visit natm.com/compliance-verification-program



PLUG & PLAY LIGHTS

Quick disconnect light terminals, along with our use of dielectric grease, makes for easy maintenance and a corrosion free application.



#### STEEL BELTED BIAS TIRES

Two or more layers of nylon cord PLUS two steel belt layers resulting in improved tire tracking, increased tread wear, longer tire life, reduced heat build up, and a smoother ride.



ALUMINUM DIAMOND PLATE FENDERS

Lightweight, durable and won't rust. Also a sharper look for your boat and trailer package.




### ELIMINATOR GALVX VENTED ROTOR DISC BRAKES

Aluminum calipers and the vented rotor design allows for cooler braking contributing to longer brake pad life. GalvX finish is perfect for both salt water and fresh water use.



**HEAVY DUTY WINCH STRAPS** 

NO rusting. NO kinking. NO fraying. High capacity winch straps are safer and easier to operate.



#### SUPER LUBE SPINDLES

The Super Lube system provides for greater extended bearing life by thoroughly distributing grease throughout, and eliminates the need to disassemble the hubs and repack the wheel bearings by hand.



D.O.T. COMPOSITE BRAKE LINE WITH BRASS FITTINGS

Enjoy the benefits of a non-corrosive and flexible brake line compared to steel brake lines.



### GLAVANIZED HARDWARE, U-BOLTS, WINCH STAND, AXLES, TONGUE AND MANY OTHER COMPONENTS

Keep your trailer looking newer longer with hot dip galvanized components. Better corrosion resistance than the alternative industry standard zinc.



## LIMITED WARRANTY

Venture Trailers Inc. ("Venture") warrants each new Venture trailer ("trailer") to be free from defects in material and workmanship for a period of two years beginning from the date of original purchase by the original purchaser. Venture shall repair or replace at Venture's sole option, without charge, any parts that are determined by Venture to be defective because of imperfect workmanship or materials within a reasonable time after the trailer is returned at purchaser's expense to any Venture authorized dealer or distributor.

This warranty is extended to the original purchaser only and does not extend to any other persons to whom the trailer may be transferred. The use of any trailer as part of a rental fleet or for commercial purposes voids this warranty.

Provisions of this warranty shall not apply to any product found to have been modified or altered in any way, or to any defect or malfunction caused by damage, unreasonable use, or failure to provide reasonable and necessary maintenance. This warranty will not cover damage caused by overloading the trailer beyond stated capacities or the use of improperly installed weight distribution hitches. The formation of rust is not covered by this warranty due to the highly corrosive conditions to which a trailer may be exposed. This warranty does not cover winches, lights, couplers, brakes, tongues, jacks, springs, axles, and tires or wheels, as these items are warranted separately by their respective manufacturers. This warranty also does not cover defects, damage, or malfunctions caused by improper configuration by any dealer or distributor of the trailer.

Certain trailer components are considered wear items including, but not limited to: tires, bearings, seals, races, brake friction surfaces, and carpet. These items must be inspected, maintained, and replaced by the owner as necessary. Bearings, seals, and races are covered for 120 days from the date of purchase.

- ➤ This warranty is intended to comply with the Mangusson-Moss Warranty Federal Trade Commissions Improvement Act, as amended, and any provisions of this warranty or actions taken by Venture pursuant to this warranty shall be construed accordingly.
- Some states do not allow the exclusion or limitation of incidental or consequential damages, so those limitations or exclusions may not apply to you.
- This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.
- Venture reserves the right to change models or specifications without prior notice.

# TRAILER FEATURES

- ▶ Plug & Play Lights
- Aluminum Diamond Plate Fenders
- ► Heavy Duty Winch Straps
- ▶ D.O.T. Composite Brake Line with Brass Fittings
- Steel Belted Bias Tires
- ► Eliminator GalvX Vented Rotor Disc Brakes
- Super Lube Spindles
- ► Wheel Balancing
- ► Galvanized Hardware, U-bolts, Winch Stand, Axles, Tongue, and many other components
- National Marine Manufacturers Association and National Association of Trailer Manufacturers certified

Some features are not standard on all models. Please check with your dealer for additional information.



5301 North Point Blvd, Baltimore, MD 21219 venturetrailers.com | 410.388.1000



YOUR AUTHORIZED DEALER	2



